


# Storage of roof sheeting on construction sites

- Aluminium sheeting and Zinalume Colorbond metal sheeting are known to perform extremely well when exposed to the elements, due to the protective coating and paint coating as well, thus offering a strong barrier against these elements.
- Basic precautions must be taken by the clients when storing roof sheeting in bundles on sites. The protective nature of these coatings may be seriously impaired if the sheeting are stored in bundles and left exposed to the sun's heat and wet or moist conditions from rainfall, due to the absence of air in between the sheeting.
- The sheeting rise to high temperatures when exposed to the sun with the risk creating condensation inside the bundle. Both rainwater and water vapour can easily be drawn in between the profiled/corrugated sheeting by capillary action. Due to the absence of freely circulating air, the moisture cannot evaporate, causing unfavourable conditions which could result in wet storage corrosion causing discolouration of the sheeting and eventually to the formation of white rust.
- Profilage® recommends to store the sheeting under a covered shed and free from water both during transport to and storage on construction sites
- Please refer to note 17 of our conditions of sales


# Storage of roof sheeting on construction sites

## Storage Conditions **to Avoid**

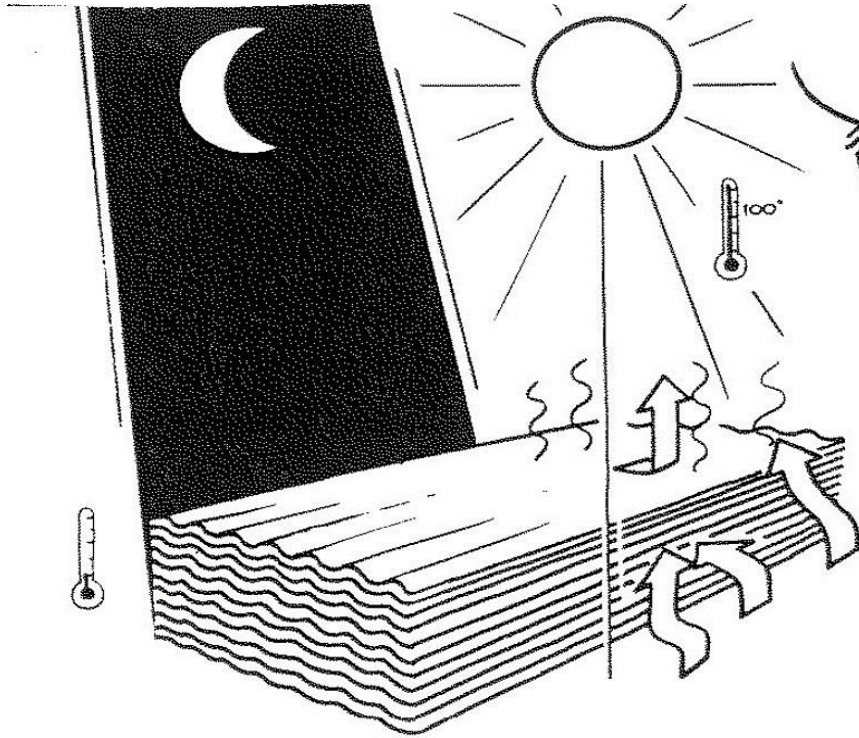

# Storage of roof sheeting on construction sites

## Good storage of roof sheeting

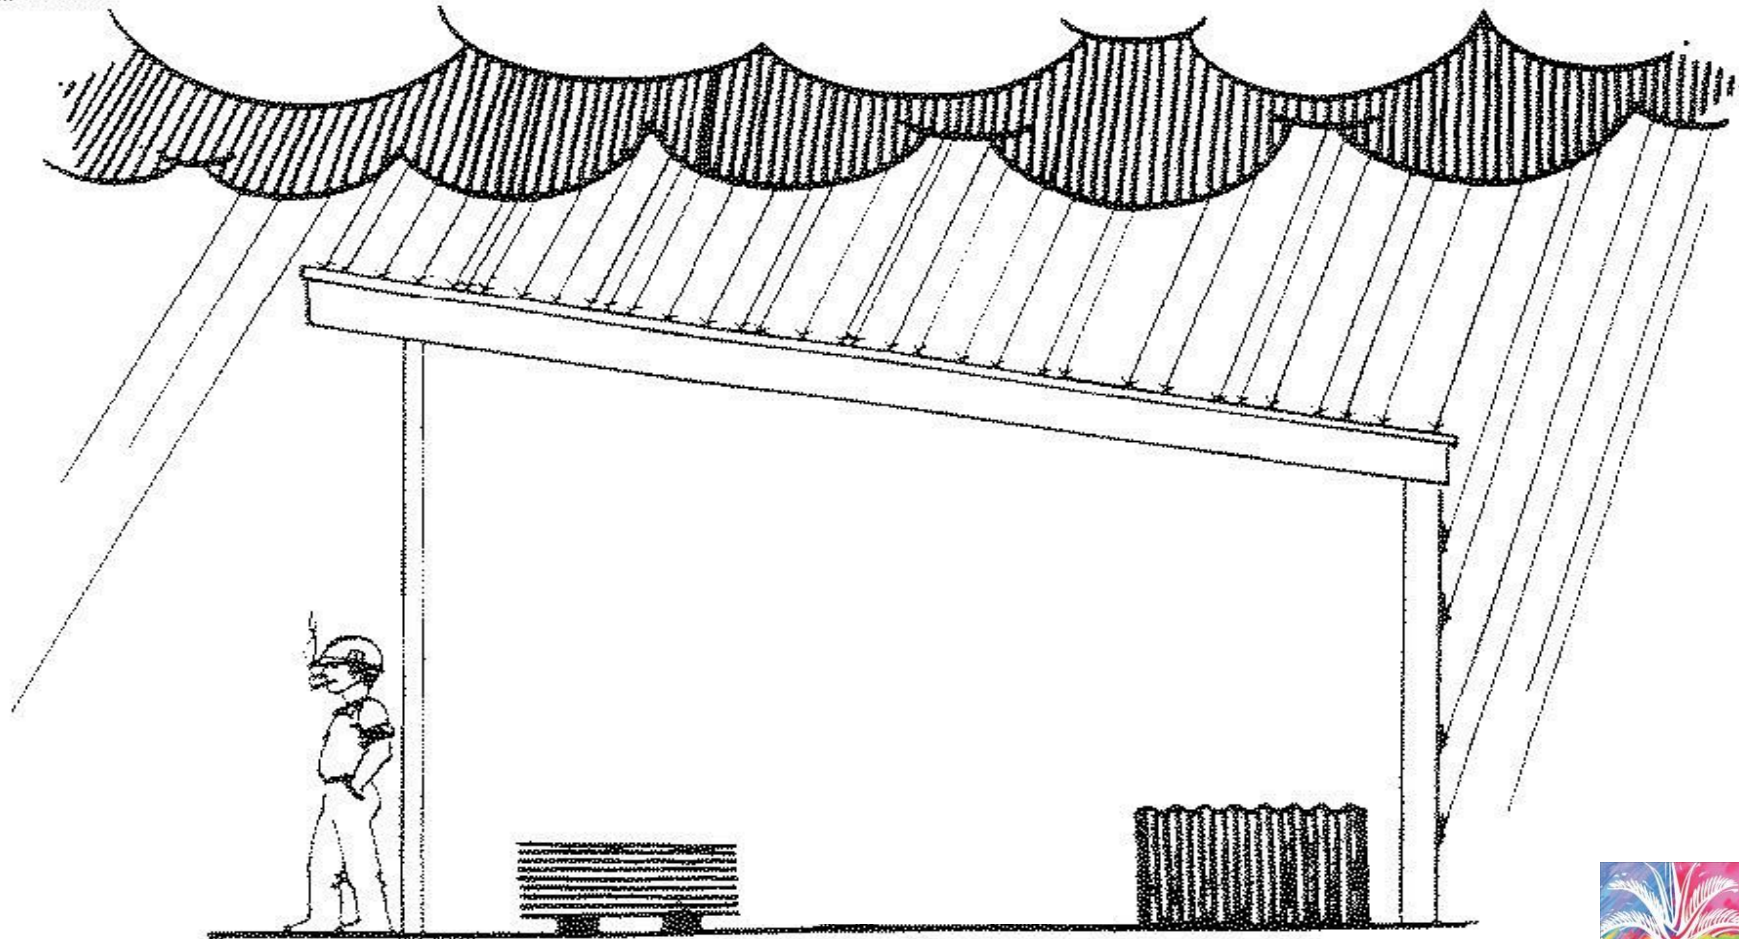

**PROFILAGE®**

Profilage Océan Indien Ltée